


Performance Chart

Husky 515

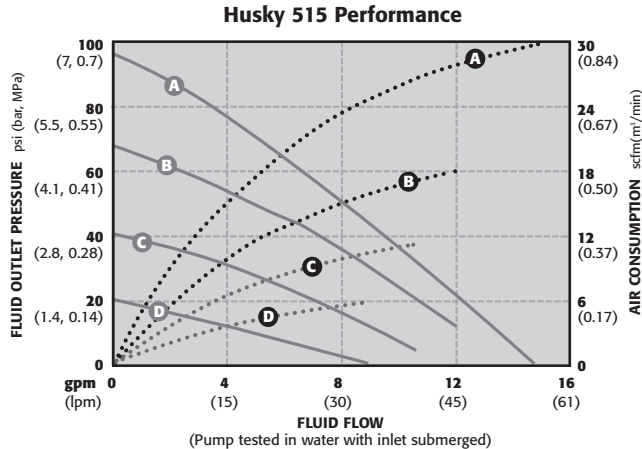

AIR PRESSURES	LEGEND
(A) = at 100 psi (7 bar, 0.7 MPa)	Air Consumption ••••
(B) = at 70 psi (4.9 bar, 0.49 MPa)	Fluid Flow ———
(C) = at 40 psi (2.8 bar, 0.28 MPa)	
(D) = at 20 psi (1.4 bar, 0.14 MPa)	

How to use these chart:

- Step 1:** Locate the required fluid flow rate along bottom axis of chart.
- Step 2:** Follow vertical line to the intersection with the solid curve (A, B or C – based on your air inlet pressure).
- Step 3:** Follow to left axis to read fluid outlet pressure.
- Step 4:** From Step 2, follow vertical line up or down to the intersection with the dotted line (A, B or C – based on your air inlet pressure) then follow to right axis to read air consumption.

Example*

To obtain 80 gpm (302.8 lpm) at approximately 50 psi (3.4 bar, 0.34 MPa) you will need 100 psi (7 bar, 0.7 MPa) of air pressure. The air consumption will be approximately 70 scfm.