

PRODOZ
MECHANICAL DIAPHRAGM
TYPE METERING PUMPS

MPM
SERIES




Mechanical actuated , long life strong diaphragm
Easy installation and maintenance
Accurate and 0-100 adjustable flow rate
Economical and practical design
Automatic 4-20 mA operation as option

Capacities up to 150 lt/hr
Pressures up to 10 bar
Accuracy \pm %1
Temperatures between -10 °C / +40 °C
Max suction height 2 m
Standard electric motors of 220/380 V, 50 Hz

Manual stroke adjustment is standard.
Digital controller is available as option.

	MATERIALS	
Pump Head	SS	PVC
Valve Seats	SS	PVC
Diaphragm	PTFE/EPDM	PTFE/EPDM
Valve Ball	SS	CERAMIC

Accessories

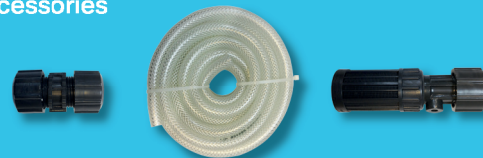

Prodoz Model	Capacity	Max. Pressure	Pump Speed	Stroke Length	Pipe Connection	Motor Power	Weight
	(lt/h)	(bar)	(spm)	(mm)		(W)	(kg)
MPM-6.5-10	6,5	10	54	2	d: 9 D: 15	60	7,3
MPM-12-10	12		108				
MPM-24-10	24		90	4			
MPM-32-10	32		135				
MPM-42-10	42		135	5			
MPM-60-10	60	150					
MPM-80-05	80	5	150	4	DN 15	90	8,5
MPM-90-05	90		135				
MPM-100-05	100		150				
MPM-110-03	110	3	150	4			
MPM-120-03	120		135				
MPM-150-03	150		150	4			